

GLASS FUSING KILNS-FIREBOX 8x6 LT

The Perfect Starter Kiln

Fire ceramics, glass, metal, clay...this mini-kiln does it all with easy to use preset programs. It plugs into standard household voltage, has a UL safety listing, and includes a shelf kit and kiln wash. What more could you want? The ideal kiln for beginners.

FEATURES

Brand New Controller

The FireBox 8×6 LT now has a brand new controller that allows you to fire Glass and Ceramics. It even has built in programs for Precious Metal Clay. Here is what you get:

- GlassFire Mode allows you to write a program simply by choosing your technique and the speed. It's that easy!
- ConeFire Mode allows you to fire Ceramics simply by entering the Cone Value, Firing Speed and Hold Time.
- PMC Mode is even easier. All you enter is the type of Metal Clay you are using and press start.
- Write your own firing programs with up to 8 Segments using Ramp and Hold. Now you can store up to 5 programs.
- Adjust temperatures or hold times while the kiln is firing using Add Time or Add Temp or simply select Anneal Now to set your project and begin annealing it.




Plugs Into Household Voltage

Nothing against electricians, but who really enjoys paying to have their house rewired? With the FireBox 8×6 LT you take it out of the box, plug it into any spare 120V outlet you have in the house and you are ready to start fusing. Okay, it does need to be a grounded outlet.

Stay Cool Handle


Glass fusers are always lifting their lids when their kilns are hot to take a peek. The wood handle on the FireBox 8×6 LT stays cool even when the kiln is at peak temperature.

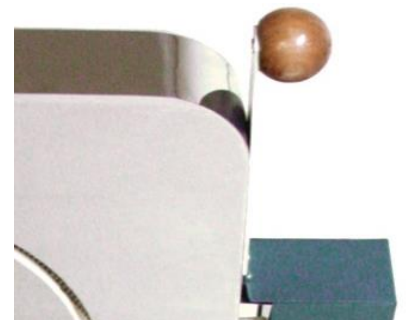

Lid Opens Over 90 Degrees

Why is this important you ask? We are glad you did. When the lid can open past 90 degrees it will not be in your way when you go to load your shelf. That's it!

PRODUCT SPECIFICATIONS & DIMENSIONS

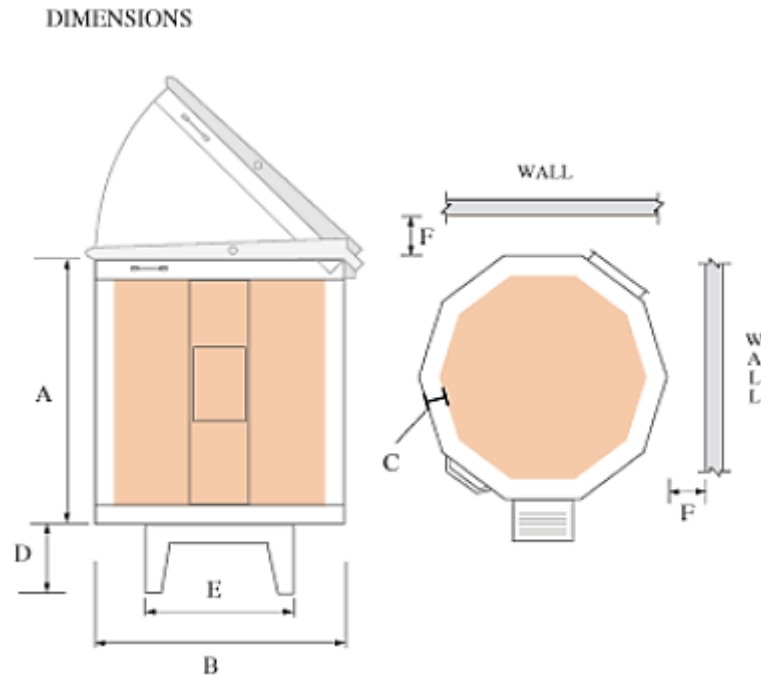

Model	Phase	Volts	Maximum		Power		Copper Wire Size	NEMA Receptacle	BTU's
			Cone	Temp(F)	Amps	Watts			
Firebox 8x6 LT	1	115	6	2250	15	1800	12	5-15	2600

Chamber Capacity

Approximately 8 in. x 8 in. opening and 6.5 in. high: 0.22 cubic feet.

Depth	Opening Width	Opening Length	Cubic Ft.
6.5 in.	8.0 in.	8.0 in.	0.22

Controller

Thermocouple: -
 Clock: 60 Mhz
 Voltage: 0 DC Relays
 Output: 0 Volts DC
 Fuse: 0.5 AMP



THE WARRANTY

- Unlike most warranties, ours covers Parts AND Labor.
- Never Pro-Rated.
- Serviced by the most extensive, knowledgeable and talented distributor network in the industry.

Backed by a company whose mission statement is “We help you make great things”. When your kiln is down, you can’t make great things.



SHIPPING

Weights listed are only approximations. Actual weight will vary due to humidity levels and varying brick density.

Weight (lbs): 58

Skutt Kilns should arrive fully assembled.

Packed with the kiln you will find the following items:

- 1 Shelf and 3 posts
- Kiln Wash

